

AQUAPRO™

WATER BASED FLOOR COATINGS

Ask your local distributor about Aquapro



AUSTRALIAN MADE & MANUFACTURED



Aquapro Outdoors Plus Decking

is a premium, water-reducible, solvent-free, oil-based coating for exterior decking and walkways. It is hardwearing with outstanding adhesion and toughness as well as slip and UV resistance (when used with additives).

- *Easy to use*
- *Hardwearing*
- *Solvent Free*
- *UV Resistant*
- *Slip Resistant*
- *Non-toxic, low odour*



Call Us - Tel: (02) 9666 3888

www.polyure.com.au

APPLICATION METHOD

BY BRUSH, ROLLER, SPRAY OR DIP.

Good preparation is key to a professional looking, long lasting finish:


1. New timber – Power wash using OUTDOORS TIMBER STRIP to remove all extractives and sterilise any fungus or mould. This will also help open the timber grain to assist with penetration of the coating.
2. Old timber – Wash with OUTDOORS TIMBER PREP and a strong jet of water to rid the surface of oxidation (greying). Test adhesion in a small area.
3. Mist deck lightly with water before application during hot dry weather, this will help the AQUAPRO OUTDOORS PLUS DECKING to penetrate the timber.



4. Stir thoroughly before and during application. Apply liberally along the lengths of the boards (coat no more than 2 or 3 at a time to maintain a wet edge and prevent lap marks). Allow overnight to dry.

5. Apply a minimum of 2 coats, use 3 coats on porous surfaces.

6. Spraying: Airless spray recommended. Use a 0.33 to 0.38mm (13 – 15 thou) orifice, 10cm fan (dependent on job) with a regulated pump pressure of 350-400 kPa (50 – 55 psi) tip pressure. Back brushing is recommended to achieve an even finish. Use normal protection i.e. mask, overalls. Watch your overspray. Wash off with soap and water before it dries.

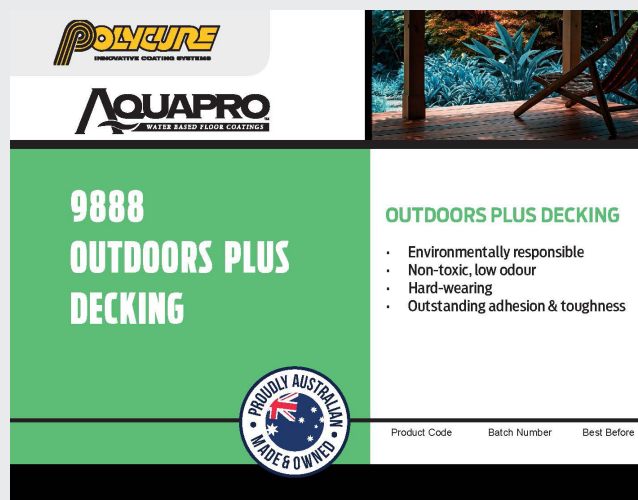

Specifications	Heat / Temperature	Do not apply if temperature is below 15°C or above 30°C. Do not apply in full sun or when rain or heavy dew is expected within 2 days.
	Drying	Recoat – 3-4-hour Light Foot Traffic – 12 hours In cooler or humid conditions drying times will be longer.
Properties	Colour	Natural, lightly pigmented
	Finish	Satin - Gloss
	VOC Level	<38g/L
	Thinner	To help maintain a wet edge and reduce drag on hot days Aquapro Outdoors Wet Edge Extender can be used.
	Pack Sizes	4L, 10L
	Product Code	PO AQOTPD-04
	Clean Up	Water Clean up