



## Premium Waterborne Finishing Systems

### Product Description

## Loba WS 2K Contact

**Loba WS 2K Contact** provides additional protection for prefinished floors and offers a lifeline to older prefinished floors that are starting to look tired.

**Loba 2K Contact** is an adhesion promoting primer which basically makes coating stick to things it wasn't designed to, which makes it perfect for refinishing factory coated floors which often contain nasties which stop ordinary coatings sticking to them.

**Loba WS 2K Contact** is applied with a special applicator and after 3 hours drying and it then coated with **Loba 2K Duo Extra Matt, Matt-Satin, Semi Gloss or Invisible** protection with or without sanding. Loba 2K Duo dries fast so the job is finished quick and with less mess and airborne dust/matter to spoil the finish.

**Loba WS 2K Duo** cures fast and is ideal for all application environments domestic or commercial with no need to worry about exposure to harsh solvents, residual odours, or long periods of vacant premises.


### General Coating Properties

- Extreme wear resistance
- Natural look with satin-matt, semi-gloss, extra-matt and "Invisible" sheen levels.
- Slip resistant to AS/NZS 4586:2013 - P3
- Duo "AntiSlip" meets German standard R10, AS4586 P4 for stairs and slippery areas.
- Extremely Low VOC
- Non-yellowing
- 100% polyurethane
- Non-flammable
- Fast drying (1 hour dust free, 4 hour dry film)
- Superior adhesion makes Duo suitable for re-coating most timber surfaces and some vinyl products – adhesion test recommended.

*Super Easy to Use*



**Enhanced Durability**

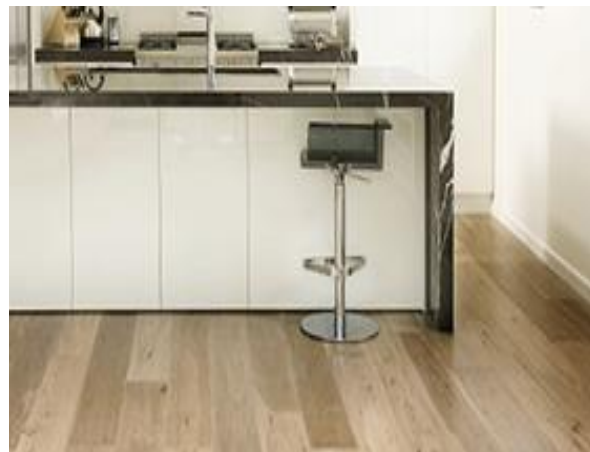

**Excellent Protection & Very Economical**





## Waterborne Finishing Systems

### Product Description

## Loba WS 2K Duo is a

two component water borne polyurethane timber finish that delivers excellent performance in either commercial or domestic timber flooring situations. Loba WS 2K Duo is one of a new era of waterborne floor coatings combining extreme wear resistance and durability with a silky smooth attractive finish that's easy to get down easy on the nose and easy on the environment.

Loba WS 2K "Duo" used in conjunction with one of the Loba timber primers will enhance the colour, retain the natural appearance and beauty of your timber, reduce the risk of edge-bonding, and provide a stylish look with the maximum protection expected of a Loba coating system.


Loba WS Duo dries and hardens fast so the job is finished quick and with less airborne dust/matter to spoil the finish. Loba WS Duo is classified non-toxic so its ideal for all application environments with no need to worry about exposure to harsh solvents, or to vacate premises for extended periods.

### General Coating Properties

- Extreme wear resistance
- Natural look with "Invisible protection", satin-matt, semi-gloss, Gloss, extra-matt sheen levels & Anti Slip.
- Slip resistant AS/NZS 4586:2013 – P3
- Duo "Anti Slip" meets German ramp standard R10 AS/NZS P4, perfect for stairs and slippery areas
- Non-toxic with only 49/L grams VOC Complies with the Green Building Council Australia
- Non-yellowing
- 100% polyurethane
- Non-flammable
- Fast drying (1 hour dust free, 4 hour dry film)
- Superior adhesion properties makes the Duo/2K contact system ideal for re-coating most solid and engineered timber surfaces.



**Extreme Protection**

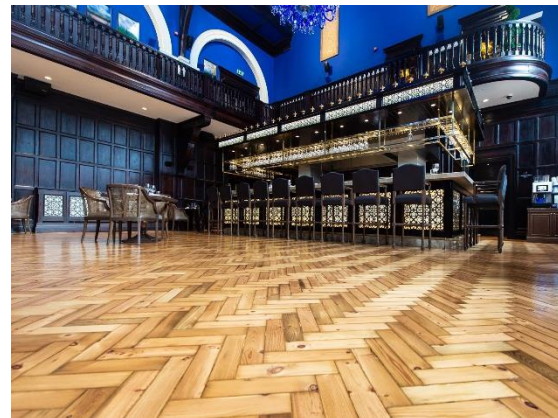

**Excellent timber colour**



**ADVANCED  
TECHNOLOGY**

## Superior Timber Finishing

**atfa** | Australasian  
Timber Flooring  
Association  
Local professionals. world-class standards.



## Waterborne Finishing Systems

### ***Basic Application Detail For Loba Duo / 2K Contact Coating System to Prefinished Floors***

- No sanding activity is required in this process therefore reducing the potential for sanding problems and coating contamination by dust and foreign matter.
- Complete any repairs as required.
- Ensure the floor is cleaned thoroughly, remove any residues from other trades with an applicable cleaning agent, and give general clean with **LobaCare Remover**, rinse and allow to dry.
- Mix the 2 components of **Loba 2K contact** together mixing slowly as the parts are combined, do not combine in one motion. Stir thoroughly.
- Apply **Loba 2K Contact** to the surface with the 2K contact applicator or with a stainless steel trowel and allow to dry at least 3 hours (but not more than 24hrs).
- Apply a coat of **Loba 2K Duo** evenly over the floor area Using the recommended 10mm or 12mm roller, at a coverage rate between 8-12 square metres per litre to ensure good coverage and a finish similar to the factory coating. Multiple coats of **Loba 2K Duo** can be applied if desired.
- Allow overnight drying(12 hours) before foot traffic and 7-14 days for full cure.
- Always do a sample patch on the surface to be coated and test adhesion before proceeding.

**Loba 2k Duo** is available in

- **Matt/Satin**
- **H/M Semi-gloss**
- **Extra Matt**
- **Anti Slip for stairs etc**

***and has an optional UV blocking additive for even greater protection***

